

Investigation of Atmospheric Laser Optics Test bed (A_LOT) Optical Turbulence Intensity for Free-Space Laser Communications

by Arnold Tunick, Mark Grobaker, and Ronald Meyers

ARL-MR-0657 December 2006

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Adelphi, MD 20783-1197

ARL-MR-0657 December 2006

Investigation of Atmospheric Laser Optics Test bed (A_LOT) Optical Turbulence Intensity for Free-Space Laser Communications

Arnold Tunick and Ronald Meyers Computational and Information Sciences Directorate, ARL

Mark Grobaker Science and Engineering Apprentice Program (SEAP)

Approved for public release; distribution unlimited.

REPORT DOCUMENTATION PAGE

Form Approved OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

| 1. REPORT DATE (DD-MM-YYYY) | 2. REPORT TYPE | 3. DATES COVERED (From - To) |
|---|----------------------------|-----------------------------------|
| December 2006 | Final | July 2006 to October 2006 |
| 4. TITLE AND SUBTITLE | | 5a. CONTRACT NUMBER |
| Investigation of Atmospheric Las | | |
| Intensity for Free-Space Laser Communications | | 5b. GRANT NUMBER |
| | | |
| | | 5c. PROGRAM ELEMENT NUMBER |
| 6. AUTHOR(S) | | 5d. PROJECT NUMBER |
| Arnold Tunick, Mark Grobaker, and Ronald Meyers | | |
| | | 5e. TASK NUMBER |
| | | |
| | | 5f. WORK UNIT NUMBER |
| 7. PERFORMING ORGANIZATION NAM | E(S) AND ADDRESS(ES) | 8. PERFORMING ORGANIZATION |
| U.S. Army Research Laboratory | | REPORT NUMBER |
| ATTN: AMSRD-ARL-CI-CN | | ARL-MR-0657 |
| 2800 Powder Mill Road | | ARL-MR-0037 |
| Adelphi, MD 20783-1197 9. SPONSORING/MONITORING AGENCY | V NAME(C) AND ADDDECC/EC) | 10. SPONSOR/MONITOR'S ACRONYM(S) |
| U.S. Army Research Laboratory | I MANIE(S) AND ADDRESS(ES) | 10. SI ONSOR/MONITOR S ACRONIM(S) |
| 2800 Powder Mill Road | | 11. SPONSOR/MONITOR'S REPORT |
| Adelphi, MD 20783-1197 | | NUMBER(S) |
| | | |

12. DISTRIBUTION/AVAILABILITY STATEMENT

Approved for public release; distribution unlimited.

13. SUPPLEMENTARY NOTES

14. ABSTRACT

In this report, we examine optical turbulence intensity measured at the U.S. Army Research Laboratory's (ARL) Atmospheric Laser Optics Test bed (A_LOT). Our goal is to better understand the physics relationships between refractive index structure and micro-climatological moments (since these can significantly affect free-space laser communications). Optical scintillometer data are collected over a nearly horizontal (2.33 km) propagation path and compared with *in situ* (rooftop) measurements of temperature variance. Regression analysis of time-averaged data from these different sensor systems suggests that (occasionally) optical turbulence information for an extended propagation path can be derived via point sensors, which are less costly to install and easier to maintain than scintillometer-based methods. Nevertheless, a key factor to consider is the extent of homogeneity of the optical turbulence and micro-climatological conditions along the A_LOT optical path. Additional research is recommended to further explore optical turbulence and microphysical influences on (laser) light propagation in complex areas.

15. SUBJECT TERMS

Refractive index structure, statistical analysis, correlation coefficient, temperature moments

| 16. SECURITY CLASSIFICATION OF: | | 17. LIMITATION OF ABSTRACT | 18. NUMBER OF PAGES | 19a. NAME OF RESPONSIBLE PERSON Arnold Tunick | |
|---------------------------------|--------------|----------------------------|------------------------|--|---|
| a. REPORT | b. ABSTRACT | c. THIS PAGE | SAR | 46 | 19b. TELEPHONE NUMBER (Include area code) |
| Unclassified | Unclassified | Unclassified | | 10 | (301) 394-1765 |

Standard Form 298 (Rev. 8/98) Prescribed by ANSI Std. Z39.18

Contents

| Lis | st of Figures | iv |
|-------------------|--------------------------------|----|
| Ac | cknowledgment | vi |
| 1. | Introduction | 1 |
| 2. | Data Analysis | 3 |
| 3. | Discussion | 9 |
| 4. | Summary and Conclusions | 12 |
| Re | eferences | 13 |
| Ap | ppendix A. Regression Analyses | 15 |
| Distribution List | | 37 |

List of Figures

| Figure 1. A schematic of the ARL A_LOT optical path | 1 |
|--|----|
| Figure 2. An aerial photo of the A_LOT propagation path (data from terrafly.com) | 2 |
| Figure 3. A_LOT data and regression analysis for 07 February 2006. (In the top row of subplots are the 1-min. avg. values for <i>Cn2</i> and T'. In the middle row are the 30-min. avg. values for <i>Cn2</i> and the 1-min. avg. values for the variance T' ² . On the bottom row the linear regression of 30 min. avg. values of <i>Cn2</i> and T' ² and the 30-min. avg. values for T' ² . Note that correlation statistic [R-value] is annotated within the linear regression subplot.) | |
| Figure 4. Same as figure 3 except for 06 April 2006. | 5 |
| Figure 5. Same as figure 3 except for 04 June 2006. | 6 |
| Figure 6. Same as figure 3 except for 16 June 2006. | 7 |
| Figure 7. Summary of A_LOT regression analyses. (Note that $R \ge 0.80$ for 8 of 21 cases where $R \ge 0.85$ for five cases within this group.) | 8 |
| Figure 8. Several data sets with $R \ge 0.80$ plotted concurrently. | 8 |
| Figure 9. Vector wind field analysis for selected case studies in February 2006 | 10 |
| Figure 10. Same as figure 9 except for April 2006. | 11 |
| Figure 11. Same as figure 9 except for June 2006. | 12 |
| Figure A-1. A_LOT data and regression analysis for 01 February 2006. (In the top row of subplots are the 1 min. avg. values for <i>Cn2</i> and T'. In the middle row are the 30 min. avg. values for <i>Cn2</i> and the 1 min. avg. values for the variance T' ² . On the bottom row the linear regression of 30 min. avg. values of <i>Cn2</i> and T' ² and the 30 min. avg. values for T' ² . Note that correlation statistic [R-value] is annotated within the linear regression subplot.) | |
| Figure A-2. Same as figure A-1 except for 05 February 2006. | 16 |
| Figure A-3. Same as figure A-1 except for 07 February 2006. | 17 |
| Figure A-4. Same as figure A-1 except for 10 February 2006. | 18 |
| Figure A-5. Same as figure A-1 except for 15 February 2006. | 19 |
| Figure A-6. Same as figure A-1 except for 17 February 2006. | 20 |
| Figure A-7. Same as figure A-1 except for 02 April 2006. | 21 |
| Figure A-8. Same as figure A-1 except for 06 April 2006. | 22 |
| Figure A-9. Same as figure A-1 except for 10 April 2006. | 23 |
| Figure A-10. Same as figure A-1 except for 11 April 2006. | 24 |
| Figure A-11. Same as figure A-1 except for 18 April 2006. | 25 |
| Figure A-12. Same as figure A-1 except for 19 April 2006. | 26 |

| Figure A-13. | Same as figure A-1 except for 20 April 2006. | 27 |
|--------------|--|----|
| Figure A-14. | Same as figure A-1 except for 28 April 2006. | 28 |
| Figure A-15. | Same as figure A-1 except for 04 June 2006. | 29 |
| Figure A-16. | Same as figure A-1 except for 08 June 2006. | 30 |
| Figure A-17. | Same as figure A-1 except for 16 June 2006. | 31 |
| Figure A-18. | Same as figure A-1 except for 17 June 2006. | 32 |
| Figure A-19. | Same as figure A-1 except for 18 June 2006. | 33 |
| Figure A-20. | Same as figure A-1 except for 21 June 2006. | 34 |
| Figure A-21. | Same as figure A-1 except for 22 June 2006. | 35 |

Acknowledgment

The authors would like to thank Thomas Weyrauch of the University of Maryland for providing helpful comments about this study.

1. Introduction

Optical turbulence is an important atmospheric effect that acts on the propagation of light waves to distort optical propagation paths and intensity. It is brought about by fluctuations in the refractive index in air, i.e., air density, which affects the speed at which light wave fronts propagate. Atmospheric refractions of electro-magnetic energy can cause spatial and temporal (intensity) variations in transmitted signals (Chiba, 1971; Fried et al., 1967; Ishimaru, 1978; Parry, 1981). In turn, these effects can significantly degrade (blur, shimmer, and distort) infrared images or increase transmission bit error rates in terrestrial free-space laser and ground-to-satellite communication systems.

The U.S. Army Research Laboratory's (ARL) Atmospheric Laser Optics Test bed (A_LOT) is a unique experimental facility with which to measure optical turbulence intensity (*Cn2*) and its effects on free-space laser propagation. ARL's A_LOT facility supports novel research and development for a wide range of laser communication, atmospheric optics, beam control, and imaging programs (Vorontsov et al., 2003). Within the A_LOT, a nearly horizontal, 2.33-km optical path extends from the top of a tall water tower to the Intelligent Optics Laboratory (IOL) rooftop at ARL (figures 1 and 2). Boundary layer scintillometers at the A_LOT measure continuous, path-averaged optical turbulence data along this line of sight (LOS). Scintillometers are ground-based, remote sensing instruments designed to measure optical turbulence intensity along an LOS path established between a transmitter and a down-range receiver. Scintillometer operation is based on the principle that scintillations (i.e., light intensity variations) occur as fluctuations in air density create refraction effects in propagating electromagnetic waves (Clifford et al., 1974). The refractive index structure parameter, *Cn2*, is related to the intensity of these refraction effects (also see Optical Scientific, 2003).

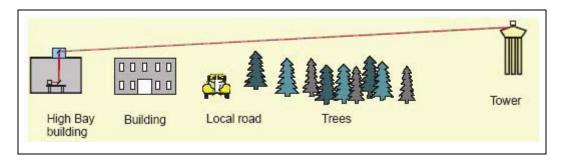


Figure 1. A schematic of the ARL A LOT optical path.



Figure 2. An aerial photo of the A_LOT propagation path (data from terrafly.com).

In addition, micro-climatological sensors collect *in situ* (point) data on a tripod (~2.0 m) above the IOL rooftop. Measured microphysical data include mean temperature, wind speed (small three-cup anemometer), barometric pressure, relative humidity, and rainfall amount. We have also integrated a single three-axis sonic anemometer (R.M. Young Company¹, Model 81000) alongside the rooftop weather station. The sonic sensor provides quite a lot of useful data for optical turbulence characterization and modeling research (e.g., mean wind velocities, wind flow turbulent statistics, and mean and fluctuating temperature data). Basically, a sonic anemometer determines wind speed and wind direction by measuring the change in the velocity of sound waves traveling between a pair of sensors (as the wind accelerates or decelerates them). These measurements are made by short pulses of ultrasonic sound in three different directions. In this way, a three-dimensional view of the wind can be determined. In contrast, recorded temperature data are determined directly from measured sound speed (c), where the speed of sound in air can be expressed as $c = \sqrt{\gamma_s R T_v/M}$. Here, T_v is (virtual) air temperature in Kelvin,

 $R=8314.32~J~mol^{-1}K^{-1}$ is the universal gas constant, and M is molecular mass, $\gamma_s=c_p/c_v$ is the ratio of specific heats. (For more details about sonic anemometry, see appendix 6.1, Principle of the Sonic Anemometer and Thermometer, in Kaimal and Finnigan, 1994.) In addition, fluctuation temperature data (T') and temperature variance data (T') can be derived from the sonic anemometer, based on the Reynolds convention, as discussed in Lumley and Panofsky (1964), i.e., $T=\overline{T}+T'$, where \overline{T} is the 15-minutes mean value, for example.

Note that the average (mid-point) elevation between the water tower and the IOL rooftop is approximately 40 m above ground level. As a result, several interesting challenges remain to obtain much desired Cn2 (and cross-wind) profile information along the optical path, particularly since it traverses a fairly complex and non-uniform landscape. The A_LOT optical path

¹The use of commercial or company names with regard to electronic products does not constitute an endorsement by the U.S. Army.

traverses an open sand lot, a fairly continuous forest stand, several local roads, and various building arrays. Naturally, complex microphysical influences may (at times) affect the A_LOT measured data and research applications. Some microclimate influences may be due to irregular wind flow patterns around the IOL and the water tower. Other effects may be due to varying wind shears, temperature gradients, and moisture changes across the top of nearby (and underlying) buildings and forest canopies. To this end, computer simulation models may provide some meaningful results, even though all the pertinent landscape or canopy data along the optical path may not yet be known or available (e.g., Tunick, 2006). At the same time, detailed data analysis and interpretation (using the A_LOT sensors server network) may help us to better understand the physics relationships between refractive index structure and microclimatological moments, since these can significantly affect free-space laser communications.

Thus, in this report, we present regression analyses of time-averaged scintillometer (*Cn2*) data in comparison to time-averaged temperature variance data (T²). We derive 21 selected case studies from winter, spring, and summer months. Correlation statistics are also derived to help quantify our results. We anticipate that this research will provide new (and potentially useful) information with which to better predict optical turbulence conditions along the A_LOT optical path.

2. Data Analysis

In this section, we present a few graphs to illustrate the kinds of data that were analyzed for the 21 case studies previously mentioned. A complete set of data graphs for the study is provided in the appendix. As an example, figures 3 through 6 present data for 07 February, 06 April, 04 June, and 16 June 2006, respectively. Each graph contains six subplots. In the top row of each graph are the 1-minute average values for Cn2 and T'. In the middle row are the 30-minute average values for Cn2 and the 1-minute average values for the variance T². On the bottom row is a linear regression and scatter plot of 30-minute average values of Cn2 and T² as well as the 30-minute average values for T². Note that correlation statistics (R-values) are annotated within the linear regression subplots. The R-values indicate the extent of correlation; 1 is a perfect positive correlation, 0 is no correlation, and -1 is a perfect negative correlation. In figures 3 through 6, R > 0.93 for 07 February and 06 June, whereas R = 0.35 on 04 June and R = 0.04 on 16 June. Nevertheless, correlations were R > 0.80 for 8 of 21 cases studied (see figure 7). Within this group, five cases had correlations R > 0.85. Several of these "high" correlation cases are plotted concurrently and are shown in figure 8. Interestingly, some of the regression lines shown in figure 8 appear to be grouped by season. This raises the question why maximum values for Cn2 are greater in February and April than in June. A possible explanation may be that there was quite a lot of rain in June this year. Higher rainfall amounts would affect the microclimate (temperature and humidity) gradients along the A LOT optical path, particularly

within and above the large (underlying) forest patch (see figure 2). Here, stronger than usual evapo-transpiration processes may have taken place. Recall that *Cn2* is a function of refractive index fluctuations, which in turn are influenced by density (microclimate) gradients. Nevertheless, it is not clear from our analyses what brings about higher versus lower correlation statistics. Perhaps a key factor to consider is the extent of homogeneity (or non-homogeneity) of the turbulence and microclimate conditions along the A_LOT optical path. This is discussed in the following section.

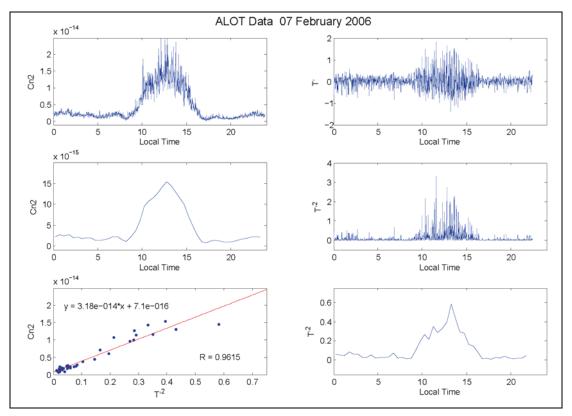


Figure 3. A_LOT data and regression analysis for 07 February 2006. (In the top row of subplots are the 1-min. avg. values for *Cn2* and T'. In the middle row are the 30-min. avg. values for *Cn2* and the 1-min. avg. values for the variance T'². On the bottom row is the linear regression of 30 min. avg. values of *Cn2* and T'² and the 30-min. avg. values for T'². Note that correlation statistic [R-value] is annotated within the linear regression subplot.)

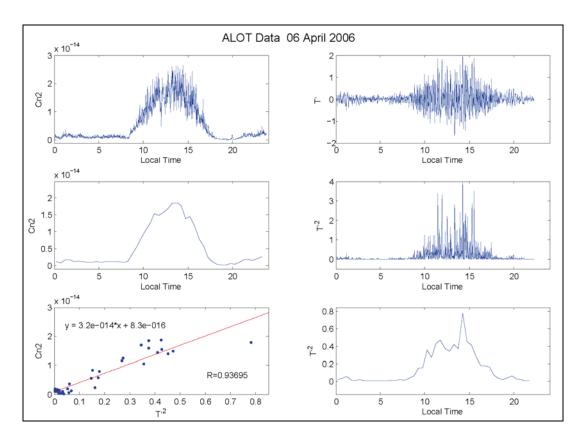


Figure 4. Same as figure 3 except for 06 April 2006.

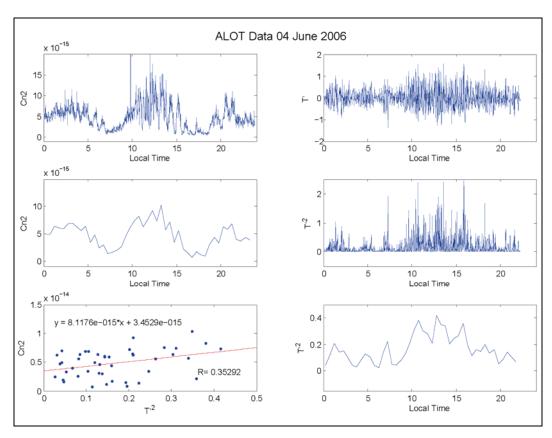


Figure 5. Same as figure 3 except for 04 June 2006.

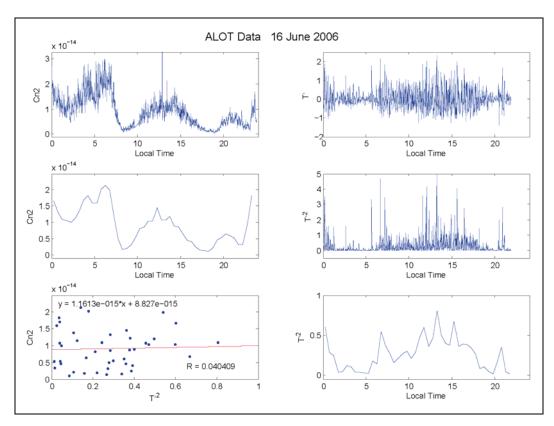


Figure 6. Same as figure 3 except for 16 June 2006.

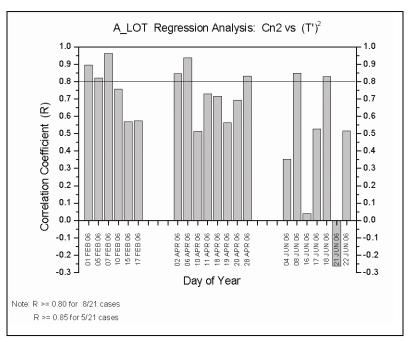


Figure 7. Summary of A_LOT regression analyses. (Note that $R \ge 0.80$ for 8 of 21 cases where $R \ge 0.85$ for five cases within this group.)

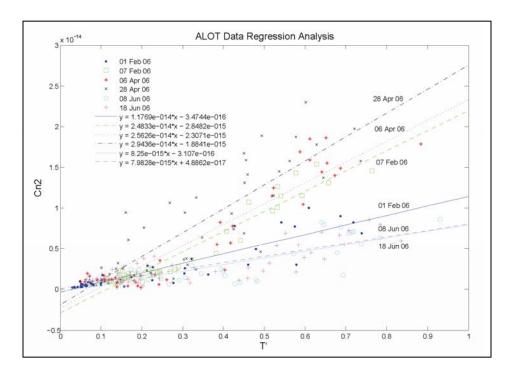


Figure 8. Several data sets with $R \ge 0.80$ plotted concurrently.

3. Discussion

Our study focuses on data recorded via two different kinds of instruments. The A_LOT scintillometer is an optical device that provides path-averaged measurements of refractive index structure. In contrast, the A_LOT sonic anemometer is a point sensor, which provides local rooftop measurements of temperature moments. Therefore, we ask whether a point sensor, located at one end of the A_LOT optical path, can characterize average optical turbulence conditions along the entire LOS. We say "average" conditions, not "instantaneous" conditions, because predicting very short-time interval optical turbulence information is nearly an impossibility. Nevertheless, we propose that in order for the *in situ* data to correlate well with the path-averaged data, a certain degree of homogeneity must exist with regard to optical turbulence conditions along the A_LOT optical path. What evidence, then, confirms (or rejects) this notion of homogeneity for the 21 cases discussed.

To begin to address this question, we conducted an analysis of the (IOL rooftop) vector wind field. Results from the analysis (so far) are presented in figures 9 through 11 for data collected in February, April, and June, respectively. Each graph is divided into four subplots. Correlation R-values are annotated on each subplot. At first, it appears that higher wind velocities (≥ 2.0 ms⁻¹) and wind direction from the southeast result in higher R-values, e.g., as confirmed by data on 01 February, 07 February, 02 April, and 06 April 2006. This link may be due to increased horizontal and vertical mixing of air parcels along the optical path. In addition, a relatively unobstructed upwind fetch exists southeast of the IOL building (see figure 2), which may provide wind flow patterns that more closely resemble the mean (path-averaged) wind field. In contrast, wind flow from other compass directions goes past adjacent buildings or forests that border the installation. While minimum wind velocity and preferred wind direction appear reasonable as a key factor for large R-values, it is (nevertheless) rejected by the data for 17 February, 19 April, and 18 June 2006. In addition, to complicate matters further, the Cn2 and T² data for 08 June (with low wind velocities) and 18 June 2006 (with winds from the northeast) were highly correlated. Thus, additional research is recommended to explore alternate factors, such as Richardson number stability (Stull, 1988), nighttime and daytime differences in Cn2, and/or clear sky and cloud cover effects on the measured Cn2 data and derived R-values (e.g., Curley et al., 2006). Also, it may be helpful to install an additional sonic sensor on the A LOT water tower. At that time, we can implement more complex, multi-parameter regression analyses to augment our research.

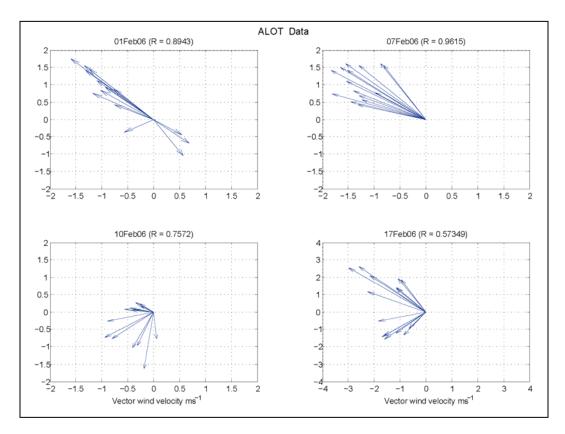


Figure 9. Vector wind field analysis for selected case studies in February 2006.

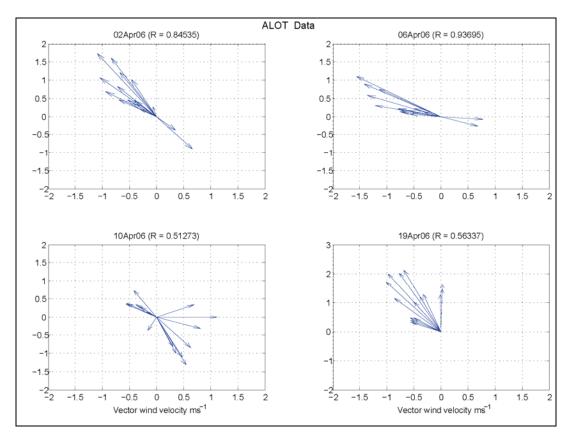


Figure 10. Same as figure 9 except for April 2006.

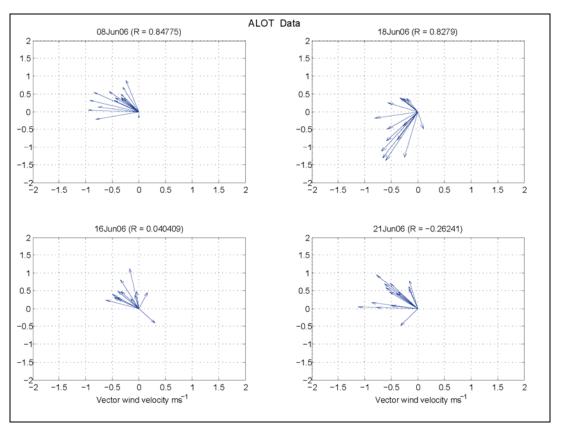


Figure 11. Same as figure 9 except for June 2006.

4. Summary and Conclusions

A_LOT sensor network data analysis was conducted to investigate physics relationships between Cn2 and T^{*2} . We found 8 of 21 cases with fairly high (i.e., $R \ge 0.80$) correlations. However, it is not yet clear what distinguishes between high versus low R-values. We suggested that homogeneity of the optical turbulence conditions along the A_LOT propagation path may be a key factor in determining correlation strength. So far, we investigated wind velocity and wind direction for several cases to support our hypothesis, but our findings were inconclusive. Nevertheless, a possible seasonal trend was detected in the regression analysis data, which can be explored in future works. In conclusion, we recommend that additional multi-parameter regression analyses be performed to better describe optical turbulence conditions at ARL's A_LOT. Multi-parameter regressions may be quite useful, particularly if an additional sonic instrument can be installed on the A_LOT water tower. As a result, new theoretical expressions can be developed to support Research and Development (and performance assessment) of advanced laser optics communications systems, including those that incorporate adaptive optics technologies.

References

- Chiba, T. Spot dancing of the laser beam propagated through the turbulent atmosphere. *Appl. Optics.* **1971**, *10*, 2456–2461.
- Clifford S. F.; Ochs, G. R.; Lawrence, R. S. Saturation of optical scintillation by strong turbulence. *Journal of the Optical Society of America* **1974**, *64*, 148–154.
- Curley, M. J.; Peterson, B. H.; Wang, J. C.; Sarkisov, S. S.; Sarkisov II, S. S.; Edlin, G. R.; Snow, R. A.; Rushing, J. F. Statistical analysis of cloud-cover mitigation of optical turbulence in the boundary layer. *Optics Express* **2006**, *14* (20).
- Fried, D. L; Mevers, G. E.; Keister, M. P. Measurements of laser beam scintillation in the atmosphere. *J. Opt. Soc. Am.* **1967**, *57*, 787–797.
- Ishimaru, A. The beam wave case and remote sensing. in *Laser Beam Propagation in the Atmosphere* 1978, 129–170, Springer-Verlag, New York.
- Kaimal, J. C.; Finnigan, J. J. *Atmospheric Boundary Layer Flows: Their Structure and Measurement*, Oxford University Press, New York, 1994, 289 p.
- Long Baseline Optical Anemometer and Atmospheric Turbulence Sensor (LOA-004) User's Guide. *Optical Scientific, Inc.* **2003**.
- Lumley, J. L.; Panofsky, H. A. *The structure of atmospheric turbulence*, Interscience Publishers, New York, 1964, 239 p.
- Parry, G. Measurement of atmospheric turbulence induced intensity fluctuation in a laser beam. *Opt. Acta.* **1981**, *28*, 715–728.
- Tunick, A. Modeling microphysical influences on optical turbulence in complex areas. Meteor. and Atmos. Physics 2006, (published on line 7 December 2007).
- Stull, R. B. *An Introduction to Boundary Layer Meteorology*. Kluwer Academic Publishers, The Netherlands, 1988, 666p.
- Vorontsov, M.; Carhart, G.; Banta, M.; Weyrauch, T.; Gowens, J.; Carrano, J. Atmospheric Laser Optics Testbed (A_LOT): Atmospheric propagation characterization, beam control, and imaging results. in *Proc. SPIE Vol. 5162 Advanced Wavefront Control: Methods, Devices, and Applications*, J.D. Gonglewski, M.A. Vorontsov, and M.T. Gruneisen (Eds.), SPIE, Bellingham, WA, 2003.

INTENTIONALLY LEFT BLANK.

Appendix A. Regression Analyses

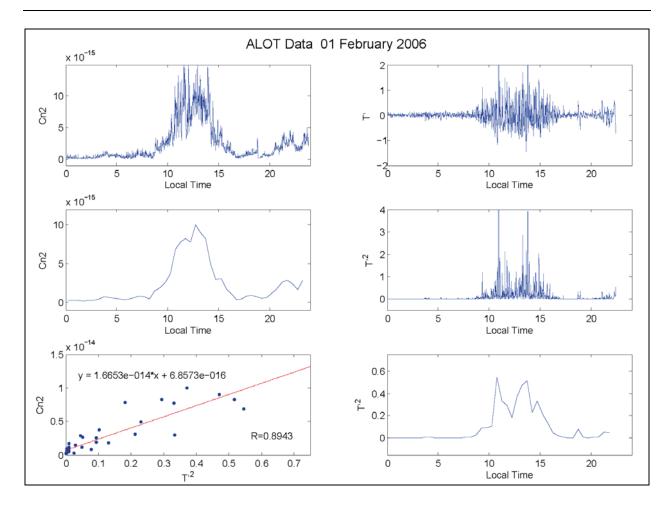


Figure A-1. A_LOT data and regression analysis for 01 February 2006. (In the top row of subplots are the 1 min. avg. values for *Cn2* and T'. In the middle row are the 30 min. avg. values for *Cn2* and the 1 min. avg. values for the variance T'². On the bottom row is the linear regression of 30 min. avg. values of *Cn2* and T'² and the 30 min. avg. values for T'². Note that correlation statistic [R-value] is annotated within the linear regression subplot.)

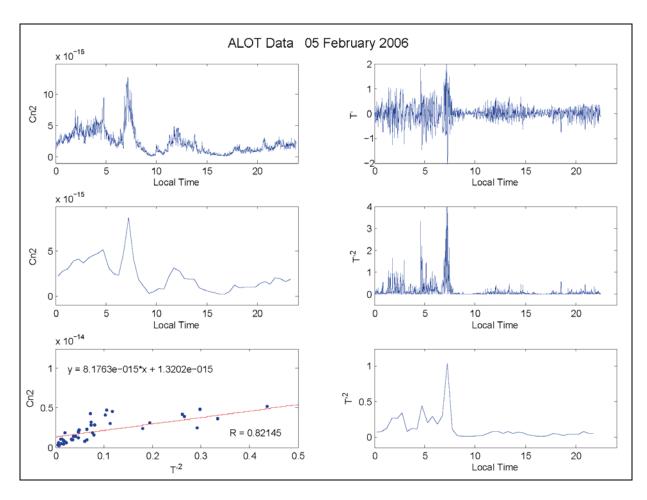


Figure A-2. Same as figure A-1 except for 05 February 2006.

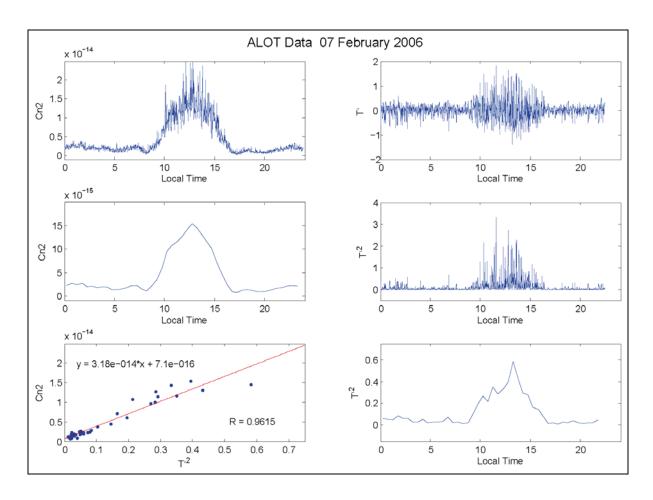


Figure A-3. Same as figure A-1 except for 07 February 2006.

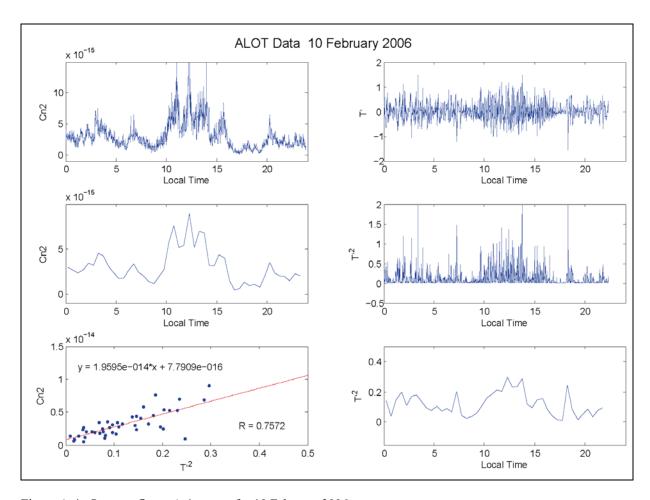


Figure A-4. Same as figure A-1 except for 10 February 2006.

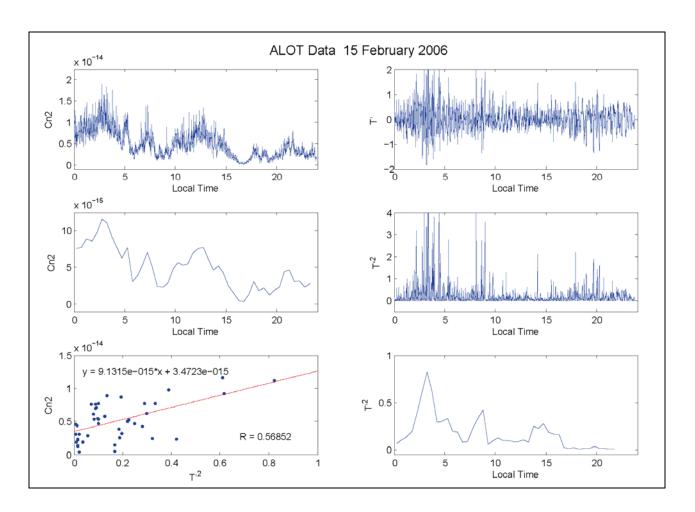


Figure A-5. Same as figure A-1 except for 15 February 2006.

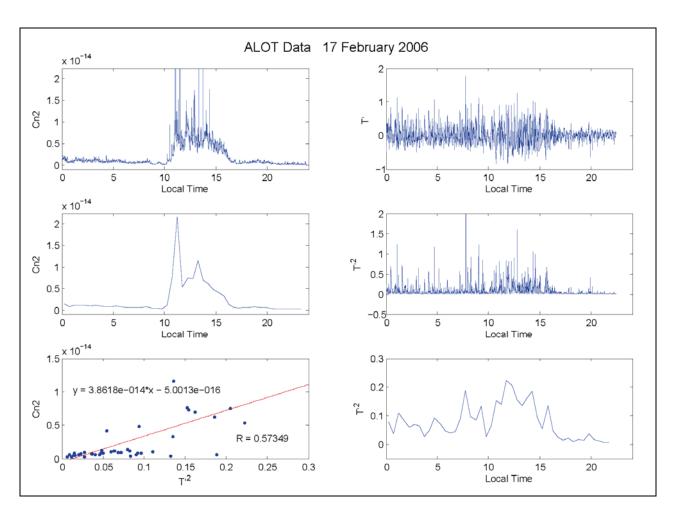


Figure A-6. Same as figure A-1 except for 17 February 2006.

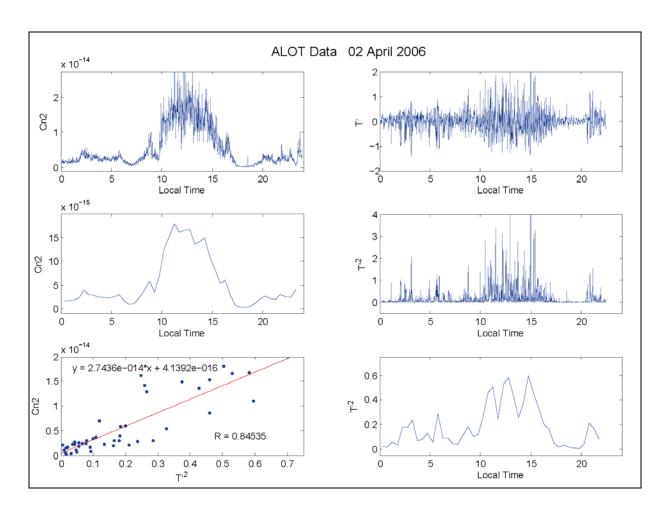


Figure A-7. Same as figure A-1 except for 02 April 2006.

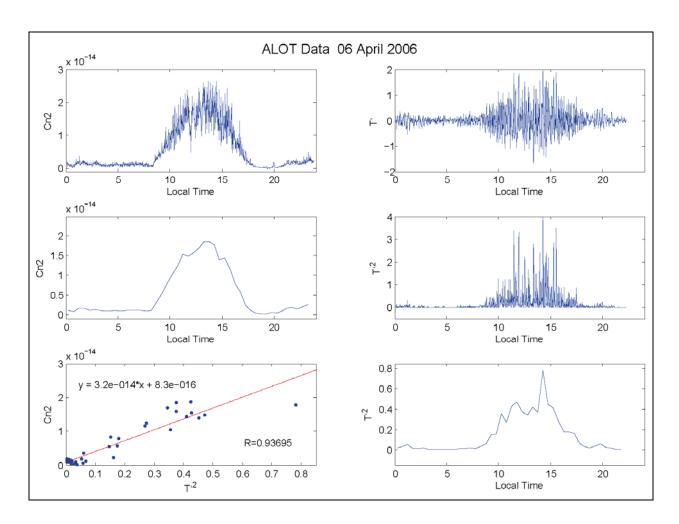


Figure A-8. Same as figure A-1 except for 06 April 2006.

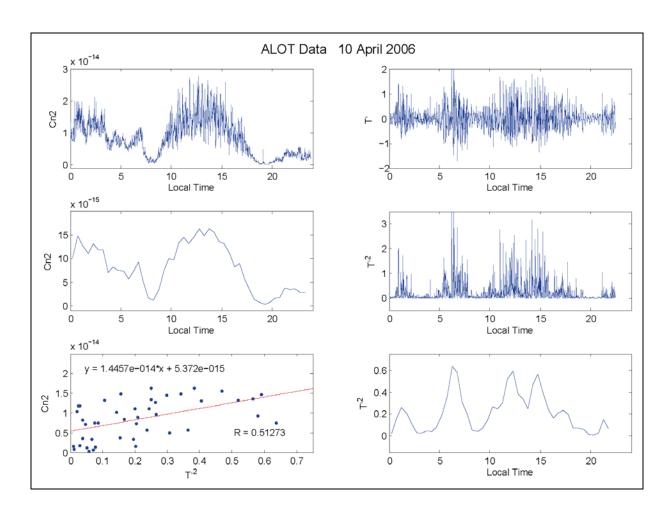


Figure A-9. Same as figure A-1 except for 10 April 2006.

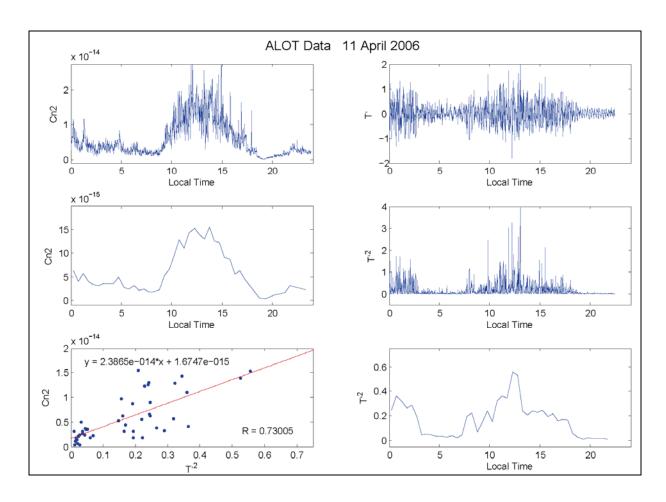


Figure A-10. Same as figure A-1 except for 11 April 2006.

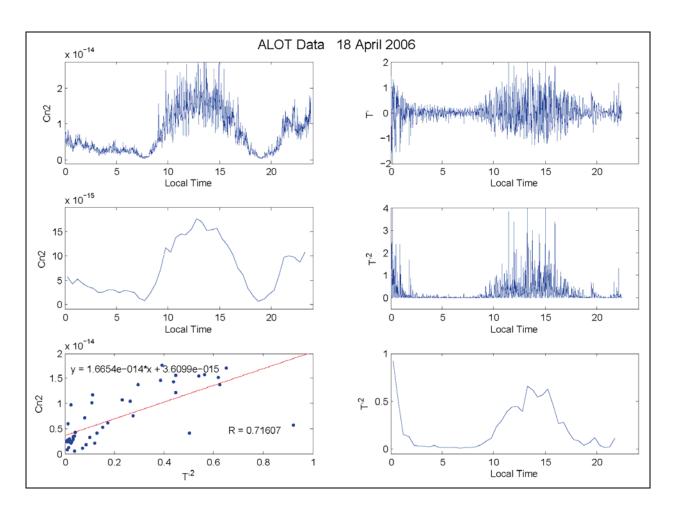


Figure A-11. Same as figure A-1 except for 18 April 2006.

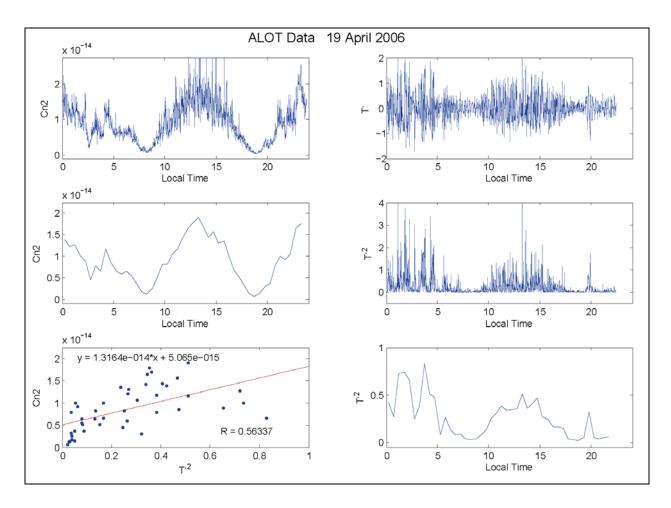


Figure A-12. Same as figure A-1 except for 19 April 2006.

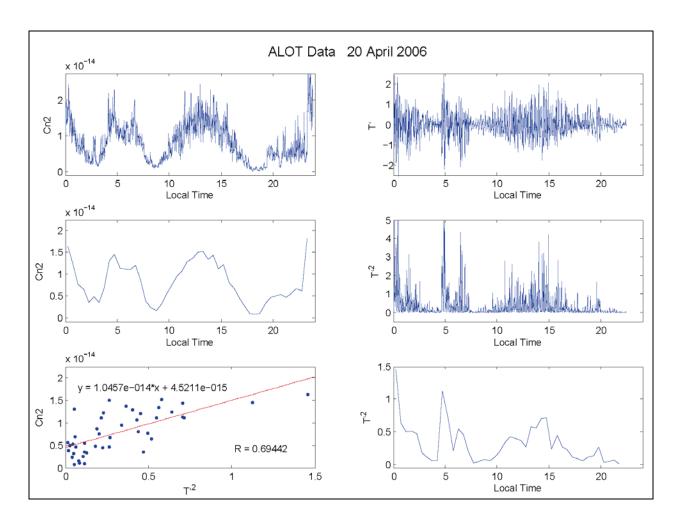


Figure A-13. Same as figure A-1 except for 20 April 2006.

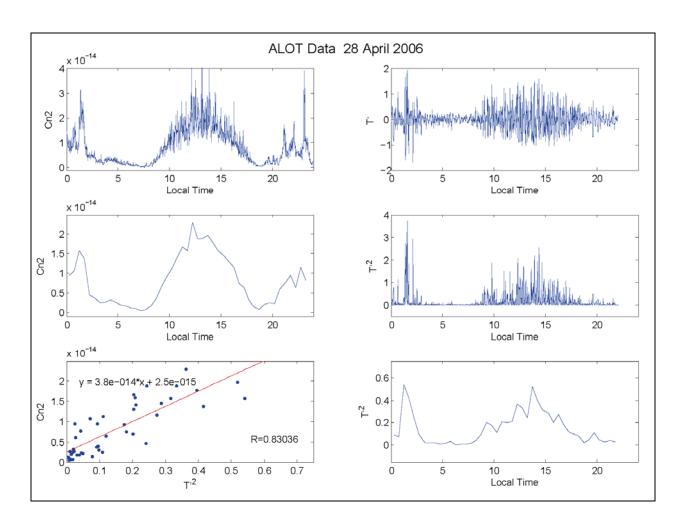


Figure A-14. Same as figure A-1 except for 28 April 2006.

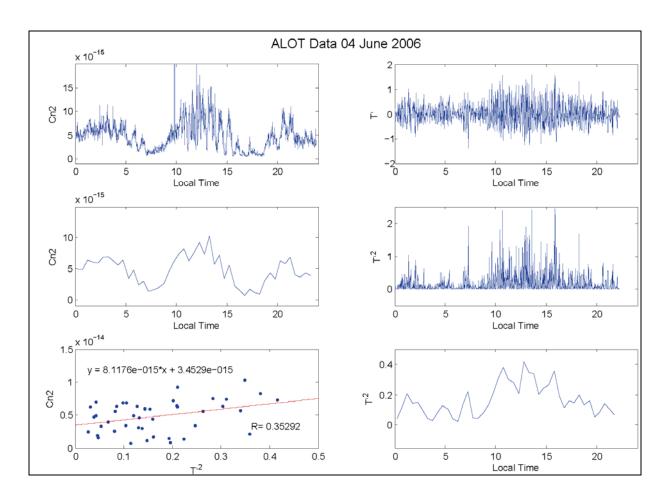


Figure A-15. Same as figure A-1 except for 04 June 2006.

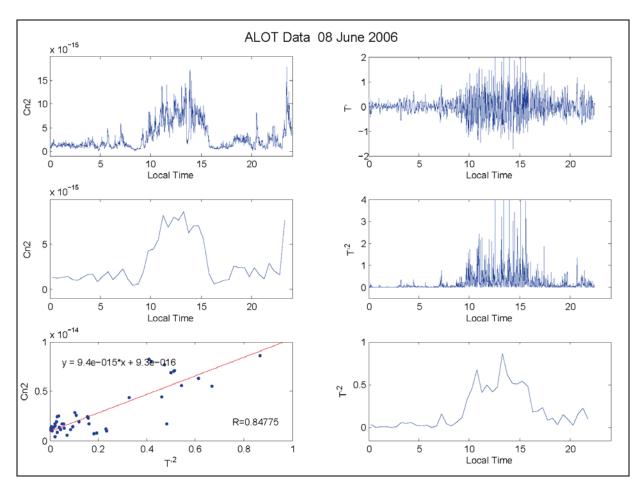


Figure A-16. Same as figure A-1 except for 08 June 2006.

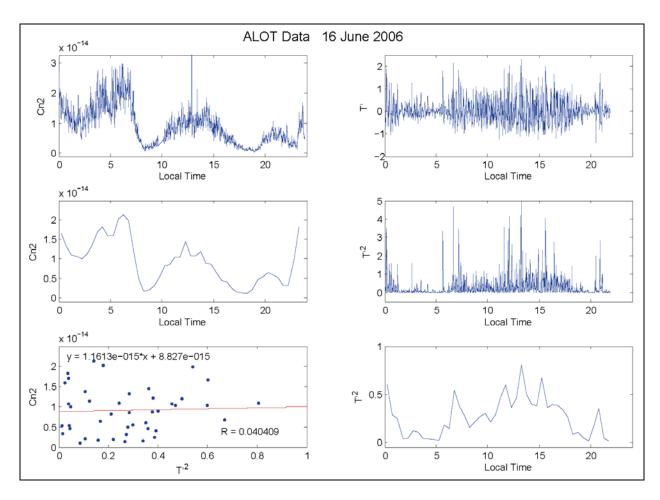


Figure A-17. Same as figure A-1 except for 16 June 2006.

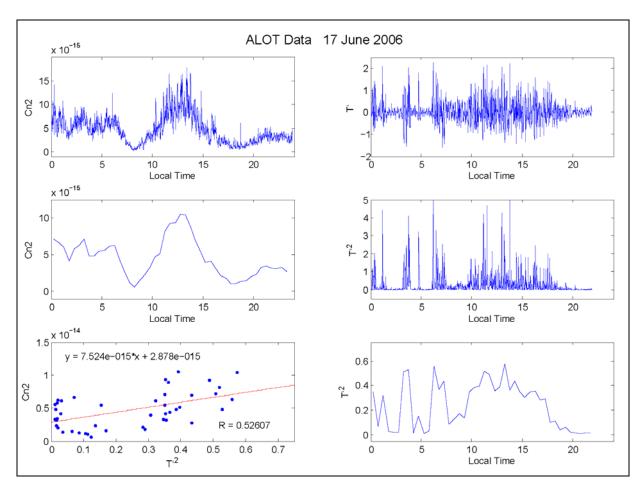


Figure A-18. Same as figure A-1 except for 17 June 2006.

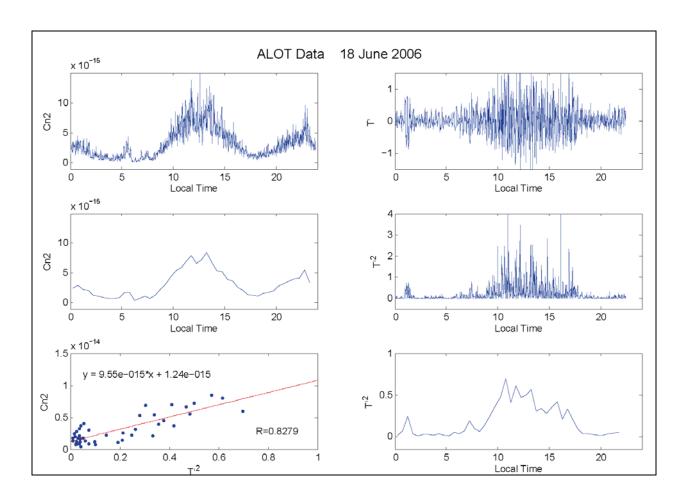


Figure A-19. Same as figure A-1 except for 18 June 2006.

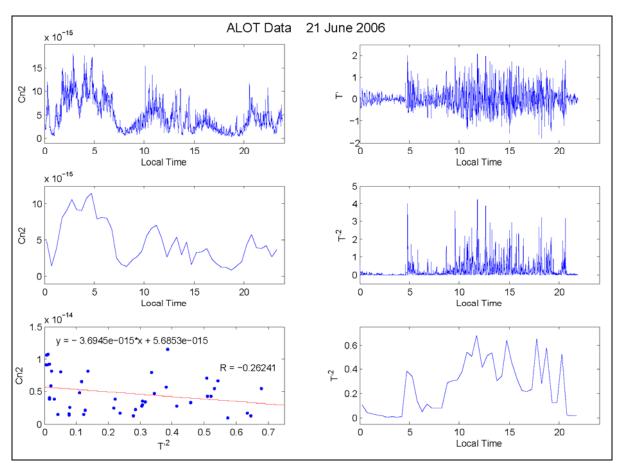


Figure A-20. Same as figure A-1 except for 21 June 2006.

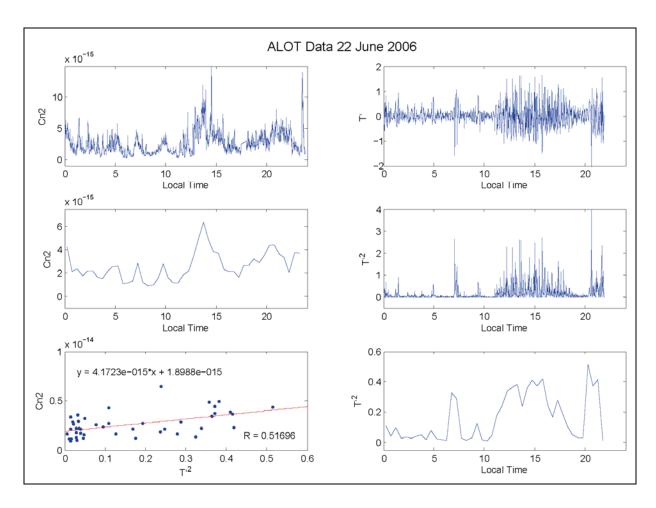


Figure A-21. Same as figure A-1 except for 22 June 2006.

INTENTIONALLY LEFT BLANK.

Distribution List

ADMNSTR
DEFNS TECHL INFO CTR
ATTN DTIC-OCP (ELECTRONIC COPY)
8725 JOHN J KINGMAN RD STE 0944
FT BELVOIR VA 22060-6218

DARPA ATTN IXO S WELBY 3701 N FAIRFAX DR ARLINGTON VA 22203-1714

SCI & TECHNLGY CORP 10 BASIL SAWYER DR HAMPTON VA 23666-1293

US ARMY CRREL ATTN CERCL-SI E L ANDREAS 72 LYME RD HANOVER NJ 03755-1290

NAV POSTGRADUATE SCHL DEPT OF METEOROLOGY ATTN P FREDERICKSON 1 UNIVERSITY CIR MONTEREY CA 93943-5001

AIR FORCE ATTN WEATHER TECHL LIB 151 PATTON AVE RM 120 ASHEVILLE NC 28801-5002

THE CITY COLLEGE OF NEW YORK DEPT OF EARTH & ATMOS SCI ATTN S D GEDZELMAN J106 MARSHAK BLDG 137TH AND CONVENT AVE NEW YORK CITY NY 10031

UNIV OF ALABAMA AT HUNTSVILLE DEPT OF ATMOS SCI ATTN R T MCNIDER HUNTSVILLE AL 35899 NATL CTR FOR ATMOS RSRCH ATTN NCAR LIBRARY SERIALS PO BOX 3000 BOULDER CO 80307-3000

US ARMY RSRCH LAB ATTN AMSRD-ARL-CI-OK-TP TECHL LIB T LANDFRIED (2 COPIES) BLDG 4600 ABERDEEN PROVING GROUND MD 21005-5066

DIRECTOR
US ARMY RSRCH LAB
ATTN AMSRD-ARL-RO-EV W D BACH
PO BOX 12211
RESEARCH TRIANGLE PARK NC 27709

US ARMY RSRCH LAB ATTN AMSRD-ARL-CI J GOWENS ATTN AMSRD-ARL-CI-C B BROOME ATTN AMSRD-ARL-CI-C M **VORONTSOV** ATTN AMSRD-ARL-CI-CN A TUNICK (12 COPIES) ATTN AMSRD-ARL-CI-CN G **CARHART** ATTN AMSRD-ARL-CI-CN G RACINE ATTN AMSRD-ARL-CI-CS K DEACON ATTN AMSRD-ARL-CI-CS R MEYERS ATTN AMSRD-ARL-CI-OK-T TECHL PUB (2 COPIES) ATTN AMSRD-ARL-CI-OK-TL TECHL LIB (2 COPIES) ATTN AMSRD-ARL-D J M MILLER ATTN AMSRD-ARL-D J ROCCHIO ATTN IMNE-ALC-IMS MAIL & RECORDS MGMT ADELPHI MD 20783-1197

INTENTIONALLY LEFT BLANK.